
versatile™ 4C Mailbox, 4C06S-1P

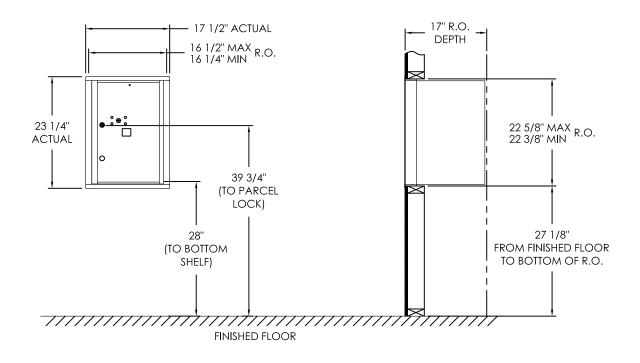

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



	.,
5935 Corporate Drive • Mar	hattan, KS 66503
800.275.1747 • www.floren	cemailboxes.com

MODEL 40	C06S-1P	REV	В
SCALE	NONE	LAS	t rev date 06/28/19
DRAWING	NUMBER		DRAWN BY
4C	O6S-1PCS		RAK